arXiv:1207.6881v1 [quant-ph] 30 Jul 2012

Noise spectroscopy using correlations of single-shot qubit readout

T. Fink[1,2] and H. Bluhm[1,2]
[1] *2nd Institute of Physics C, RWTH Aachen University, D-52074 Aachen, Germany*
[2] *JARA - Fundamentals of Future Information Technology*

A better understanding of the noise causing qubit decoherence is crucial for improving qubit performance. The noise spectrum affecting the qubit may be extracted measuring dephasing under the application of pulse sequences but requires accurate qubit control and sufficiently long relaxation times, which are not always available. Here we describe an alternative method to extract the spectrum from correlations of single-shot measurement outcomes of successive free induction decay measurements. This method only requires qubit initialization and readout with a moderate fidelity and also allows independent tuning of both the overall sensitivity and the frequency region over which it is sensitive. Thus is is possible to maintain a good detection contrast over a very wide frequency range. We discuss using our method for measuring both 1/f noise and the fluctuation spectrum of the nuclear bath of GaAs spin qubits.

PACS numbers: 03.65.Yz, 03.67.Pp, 05.40.Ca, 73.21.La

Understanding and reducing decoherence of qubits is of great interest for quantum computing. Pulse sequences like Hahn's spin echo [1] and more advanced sequences such as CPMG [2], concatenated (CDD) [3] or Uhrig dynamical decoupling (UDD) [4] have been demonstrated to decouple a qubit from its noisy environment and therefore reduce decoherence. In addition to enhancing dephasing times, such pulse sequences can also be used for noise spectroscopy by observing the resulting dependence of qubit coherence on the evolution time. Ref. [5] shows that for Gaussian noise, the spectrum's moments can be obtained using UDD. Yuge *et al.* [6] proposed a sequence of equidistant π-pulses to reconstruct the dephasing noise spectrum. A different approach relies on separating the times scales of the noise correlation and extracting long-time correlations via direct measurement while investigating short-time correlations with pulse sequences [7]. However, pulse-sequence based noise spectroscopy is subject to certain limitations: For fixed pulse sequences, the frequency region over which this technique is sensitive is proportional to the inverse evolution time, but longer durations also increase the total decoherence. This relation makes it hard to probe low frequency noise: by the time the frequency region of interest is accessible, the qubit is fully dephased leaving no measurement contrast. Depending on the details of the spectrum, this problem may be to some extend circumvented by adding more pulses and appropriate choice of their timing. However, this strategy will eventually be limited by π-pulse errors and the T_1 time of the qubit. Consider for example experiments probing the flux noise in superconducting qubits. Direct measurement of the state allows for detection of low-frequency spectral content $\lesssim 1\,\mathrm{Hz}$ [8, 9] while CPMG and UDD sequences have been used to reveal high-frequency content $\gtrsim 0.1\,\mathrm{MHz}$ [10] thus leaving a gap inaccessible with those methods. Similar limitations are encountered in GaAs electron spin-qubits, where the performance of decoupling sequences was likely limited by imperfect control pulses rather than intrinsic noise caused by nuclear spins [11].

In this Letter we propose an alternative method for determining the noise spectrum at intermediate frequencies without requiring π-pulses, and which is capable of probing the noise spectrum over an extremely wide frequency range. It is based on correlating (near) single-shot free induction decay (FID) measurements. A typical measurement cycle is depicted in Fig. 1 and consists of initializing a $\hat{\sigma}_x$ eigenstate, performing a free evolution under the influence of the noise process for time τ, a projective measurement of the final state, and repeating this process after a delay time Δt. Averaging over many such measurements allows computing the correlation between consecutive measurements as a function of Δt. A similar method was employed in the experiments of Reilly *et al.* [12], where correlations of temporal averages instead of single-shot readout were used to determine the nuclear spin noise spectrum seen by an electron spin qubit up to 1 kHz. A different approach uses dynamical decoupling techniques to introduce an effective delay time and measure correlations of the spin bath of a nitrogen vacancy qubit [13].

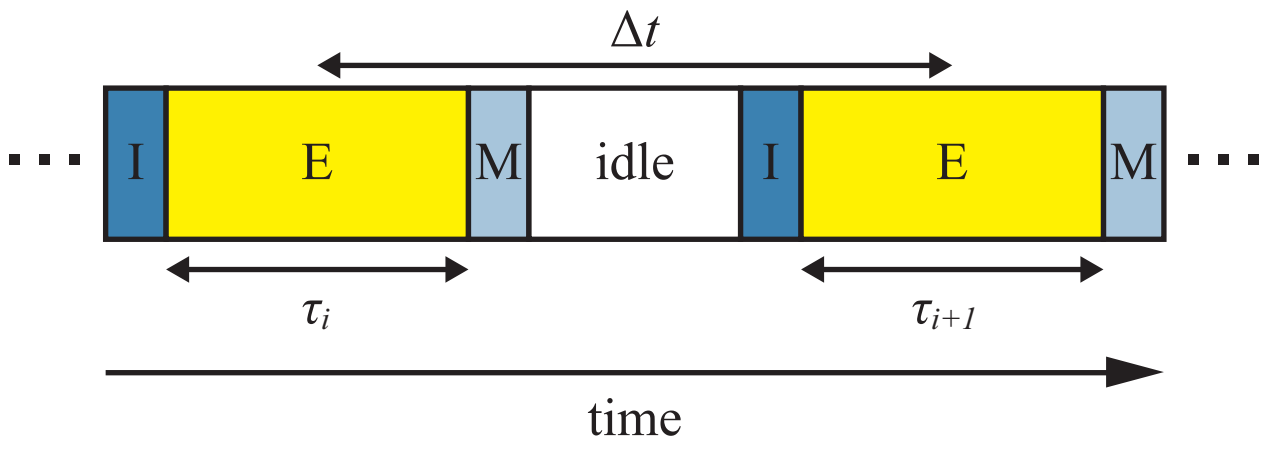

FIG. 1. (color online) Measurement cycle: Qubit initialized (I), evolution (E) for time τ_i and measurement (M) of the outcome. The delay time between two evolutions is Δt. While the initialization and measurement time set a lower limit on Δt, the idle time can be varied to adjust the delay between evolutions times.

After discussing the relationship between noise spectrum and single-shot correlations in general terms, we consider two specific examples from recent experiments to demonstrate the usefulness of our method.

The energy relaxation time of our qubits is assumed to be much longer than the evolution time of interest and we therefore only consider pure dephasing. This assumption is adequate for many experiments on electron spins [12, 14–16] and for superconducting qubits at operating points where they are linearly sensitive to flux noise [10, 17–19]. The qubit Hamiltonian therefore is

$$H = \frac{\hbar}{2}\left[\Omega + \beta(t)\right]\hat{\sigma}_z, \tag{1}$$

where Ω is the qubit energy splitting and $\beta(t)$ represents a classical noise process with $\langle\beta\rangle = 0$, which we assume to be Gaussian. We first set $\Omega = 0$ and will discuss the general case later on. The initialized state is a $\hat{\sigma}_x$ eigenstate. A subsequent measurement of $\hat{\sigma}_x$ has an expectation value $P = \cos\left[\Delta\Phi(t)\right]$, where $\Delta\Phi(t) = \int_{t-\tau/2}^{t+\tau/2}\beta(t')\,dt'$ is the phase accumulated during time τ due to noise. The autocorrelation function of the single-shot outcomes is then given by

$$\begin{aligned}\langle P_I(t)P_I(t+\Delta t)\rangle &= \frac{1}{2}e^{-\frac{1}{2}\langle(\Delta\Phi(t)+\Delta\Phi(t+\Delta t))^2\rangle}\\ &+ \frac{1}{2}e^{-\frac{1}{2}\langle(\Delta\Phi(t)-\Delta\Phi(t+\Delta t))^2\rangle}\\ &= \frac{1}{2}e^{-\frac{1}{2}\chi_+} + \frac{1}{2}e^{-\frac{1}{2}\chi_-},\end{aligned} \tag{2}$$

and takes values between 1 (perfectly correlated) and 0 (completely independent). For simplicity, we considered symmetric measurement cycles with $\tau_1 = \tau_2$ in writing Eq. 2. Asymmetric evolution times can be easily introduced to Eq. 3 and lead to reduction of the autocorrelation function due to uninteresting FID-type effects. We express the exponents $\chi_\pm$ in terms of the noise power spectrum $S_\beta(\omega) = \int_{-\infty}^{\infty} e^{i\omega\Delta t}\langle\beta(t)\beta(t+\Delta t)\rangle d\Delta t$ via

$$\langle\Delta\Phi(t)\Delta\Phi(t+\Delta t)\rangle = \int_0^\infty \frac{d\omega}{\pi} S_\beta(\omega)\frac{F(\omega\tau)}{\omega^2}, \tag{3}$$

where

$$F(\omega\tau_i) = 4\cos(\omega\Delta t)\frac{\sin\left(\frac{\omega\tau_i}{2}\right)}{\omega}\frac{\sin\left(\frac{\omega\tau_{i+1}}{2}\right)}{\omega} \tag{4}$$

is the filter function analogous to those of decoupling sequences [5]. The variances $\chi_\pm = \left\langle(\Delta\Phi(t) \pm \Delta\Phi(t+\Delta t))^2\right\rangle$ entering Eq. 2 are calculated straightforwardly. For $\tau \gg T_2^\star$, the terms $\langle(\Delta\Phi(t))^2\rangle$ are much larger than unity, but χ_- (χ_+) can be small because of correlations (anticorrelations) leading to a partial cancellation of the variances by the $\langle\Delta\Phi(t)\Delta\Phi(t+\Delta t)\rangle$ term. In this case, only one of χ_- and χ_+ can be of order unity, so that the other one is negligible because its exponential vanishes. Since correlations are more common than anticorrelations, the dominant term will typically be χ_- and thus can be measured directly. This behavior can also be understood from the filter function: χ_+ has a filter function with larger weight at low frequencies where the spectrum is typically largest, whereas the filter function for χ_- vanishes quadratically for $\omega \to 0$.

For $\Delta t = \tau$, the filter function of χ_- is identical to that of a spin echo experiment where $F(\omega\tau) = 8\sin^4(2\omega\tau/4)$ and the effect of the reinitialization on χ_- is thus equivalent to a π-pulse. Note however that to reach this limit, initialization and readout need to be negligibly short. While we have assumed $\Omega = 0$ so far, a nonzero Ω adds oscillations $\propto \cos(2\Omega\tau)$ to the first term of Eq. 2. However, the second term containing χ_- remains unaffected for $\tau_1 = \tau_2$, so that our results remain valid for $\Omega \neq 0$. By varying the delay time, Δt, we can shift the weight of the χ_--filter function in the frequency domain and thus tune the highest sensitivity to the frequency range of interest. Note that for $\omega\tau \ll 2$, the evolution time τ controls the gain factor and thus the overall sensitivity. The ability to adjust both the sensitivity's overall magnitude and position mark the strength of our method: suitable choice of evolution and delay time allows for maintaining a good measurement contrast over a wide frequency range and thus enable the investigation of spectral content. To maximize the range of applicability of our technique, fast initialization and measurement would be beneficial as they set the lower bound on Δt. However, low single shot fidelities can be averaged out and slow initialization can be replaced by projective (non-demolition) measurements.

As a concrete application of our method, we consider electron spin qubits based on gate-defined GaAs quantum dots. For two-electron spin qubits in double quantum dots, the requirements of fast initialization and readout have already been shown [15, 20], and they could likely be achieved with similar techniques for single-spin qubits. For these qubits, the hyperfine interaction couples the electron spins to $\sim 10^6$ nuclei in their respective dots. The resulting Overhauser field B_{nuc} contributes to the Zeeman splitting of the electrons and its temporal fluctuations are the main source of dephasing. For two-electron singlet-triplet qubits, the difference of the Overhauser field in the left and right dot $\Delta B = B_{\mathrm{nuc}}^{\mathrm{l}} - B_{\mathrm{nuc}}^{\mathrm{r}}$ acts in the same way [11, 21].

For this qubit system, $\beta(t) = \frac{g\mu_{\mathrm{B}}}{\hbar}\Delta B_z(t)$, where $g = -0.44$ is the effective gyromagnetic factor for electrons in GaAs and μ_{B} is Bohr's magneton. The temporal fluctuations in the dots are due to spin diffusion processes that enable distant nuclear spins to exchange polarization. Treating these processes as classical diffusion, one finds that the noise spectrum of the Overhauser fields is proportional to ω^{-2}. Theory [22] and experiments indicate an $\exp(-t^4)$ decay, which implies that the ω^{-2} dependence is limited at approximately 10 kHz. However, available data [11, 23] is insufficient to quantitatively characterize the high frequency behavior. Ref. [24] argued that the nuclear spin coupling strength sets an upper cutoff to this behavior and modeled the rolloff as a reduction factor of the form $\exp\left[-(\omega/\omega_E)^\gamma\right]$. To demonstrate that our method could verify this cutoff behavior, we consider a spectral density of the form

$$S_{\Delta B_z}(\omega) = \frac{S_0}{1+\left(\frac{\omega}{\omega_L}\right)^2} \times \exp\left[-\left(\frac{\omega}{\omega_E}\right)^\gamma\right]. \qquad (5)$$

The lower cutoff frequency (ω_L) coarsely mimics the low frequency behavior of the diffusive dynamics. It ensures a finite r.m.s. Overhauser field ($\sqrt{\langle \Delta B_z^2\rangle}$) typically on the order of a few mT [25]. The cutoff frequencies, $\omega_L/2\pi$ and $\omega_E/2\pi$, are set to 0.1 Hz and 10 kHz respectively [24] and S_0 determines the overall noise level.

The autocorrelation function of $S_{\Delta B_z}$ is shown in Fig. 2 (a). The computed correlation functions show the expected behavior: for short delay times, the probability that the two measurements return to the initial (singlet) state are perfectly correlated. By increasing Δt, this correlation decays to zero where consecutive measurement outcomes are completely independent. For short evolution times a larger change in β is required for decorrelation, so that correlations persist to longer times.

It is useful to consider analytical approximations for the relevant term (χ_- of Eq. 2). We assume that the evolution time is short compared with the relevant frequencies so that $\tau\omega_E \ll 1$. With this approximation we obtain

$$-\frac{1}{2}\chi_- \approx \begin{cases} -\frac{a}{2\pi}c^2\omega_E\omega_L^2\tau^2 S_0\Delta t^2 & \Delta t \ll \omega_E^{-1}, \\ -\frac{1}{2}c^2\omega_L^2\tau^2 S_0 \Delta t & \omega_E^{-1} \ll \Delta t \ll \omega_L^{-1}, \\ -c^2\frac{\tau^2}{\pi}\left(\langle \Delta B_z^2\rangle\right)^2 & \Delta t \gg \omega_L^{-1}, \end{cases} \qquad (6)$$

where $c = \frac{g\mu_B}{\hbar}$ is a constant and $a = \Gamma\left(\frac{1}{\gamma}+1\right)$ is given in terms of the Gamma function $\Gamma(x)$. We find $a = 1$ ($\sqrt{\pi}/2$) for $\gamma = 1$ (2). Fig. 2 (b) compares these approximations (dashed, dash-dotted and dotted line) with the exact, numerical result (solid line).

We note that in the regime of short evolution times and small noise variations $\tau^2\left(\langle\beta(t)\beta(t+\Delta t)\rangle - \langle\beta^2\rangle\right) \ll 1$, the single-shot correlation depends linearly on the noise autocorrelation [12], which provides direct access to the noise spectrum. We find that

$$\langle P(t)P(t+\Delta t)\rangle \approx \frac{1}{2} + \frac{\tau^2}{2}\langle\beta(t)\beta(t+\Delta t)\rangle - \frac{\tau^2}{2}\langle\beta^2\rangle. \quad (7)$$

In order to use our method for noise spectroscopy and, more specifically, to investigate the predicted cutoff behavior, we wish to identify the exponential's power law γ. For constant τ, a difference between the autocorrelations for exponential and Gaussian cutoff appears for delay times on the order of the inverse cutoff frequency. This frequency also corresponds to the region where the transition between Δt^2 and Δt-behavior takes place. For long delay times, the two curves merge as in this region Eq. 6 does not depend on the exact form of the spectrum, but only on the r.m.s. value of the Overhauser field. The delay time needed to distinguish different cutoff behaviors is thus on the scale of $1/\omega_E$. Note that in this regime no difference between the logarithm of Eq. 2 and $-\frac{1}{2}\chi_-$ can be detected which retrospectively justifies the assumption that the autocorrelation is dominated by χ_-. However, for a constant evolution time, χ_- varies over a large range as a function of Δt, thus limiting the range of delay times for which the autocorrelation is measurable. We therefore compensate for changes in χ_- due to a varying Δt by simultaneously adjusting the evolution time τ. In Fig. 3 (a) we chose τ so that the linear term of Eq. 6 always equals 2. The resulting curves allow a clear distinction between different cutoff exponents γ, while a change of the cutoff frequency ω_E has a qualitatively different effect. Note that the signal level of ~ 0.1 allows a good measurement contrast compared to realistic noise levels over a large range of Δt.

We now consider using our method for characterization of $1/f^\alpha$ noise which has been found to be an important

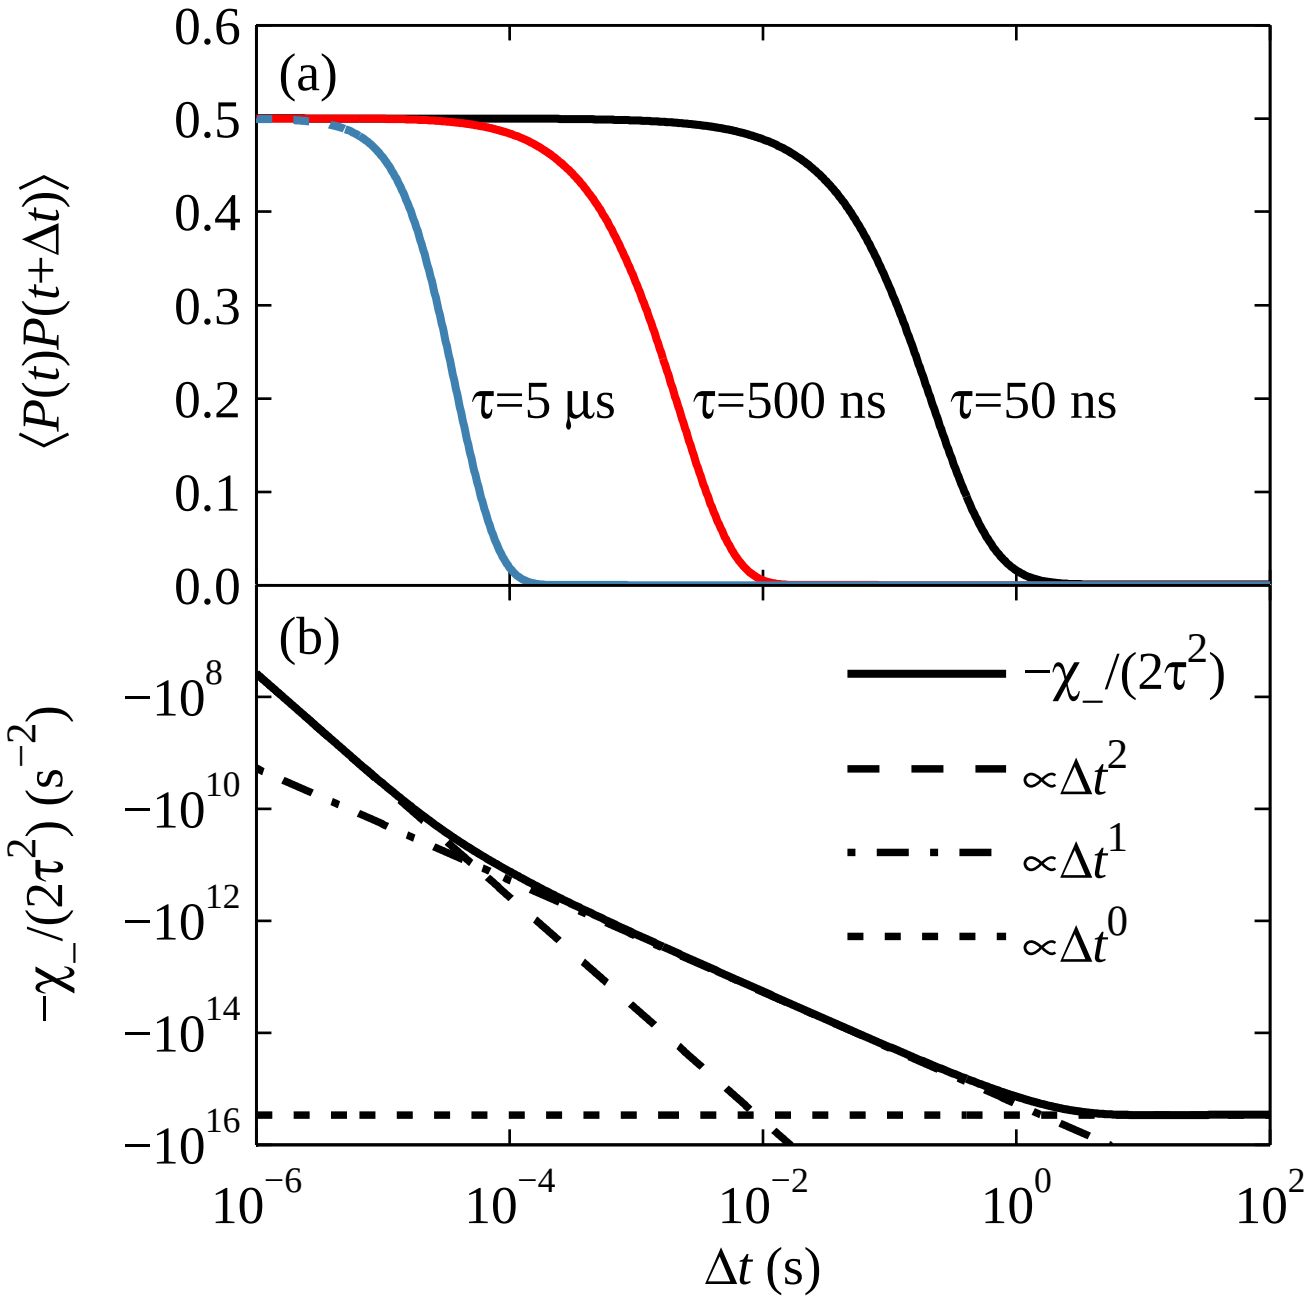

FIG. 2. (color online) (a) Autocorrelation of return probability P for evolution times from 50 ns (black) to 5 μs (blue) and exponential cutoff ($\gamma = 1$) for the spectrum in Eq. 5. Note that for the dotted part of the blue curve $\Delta t < \tau$ and thus the correlation function does not exist. (b) Exponent of the dominant term of Eq. 2. Note the three different regimes $\Delta t \ll 1/\omega_E$, $1/\omega_E \ll \Delta t \ll 1/\omega_L$ and $1/\omega_L \ll \Delta t$ corresponding to Δt^2, Δt^1 and Δt^0 behavior, respectively, as discussed in the text. Short evolution times $\tau\omega_E \ll 1$ result in a prefactor τ^2 and show a qualitatively similar behavior.

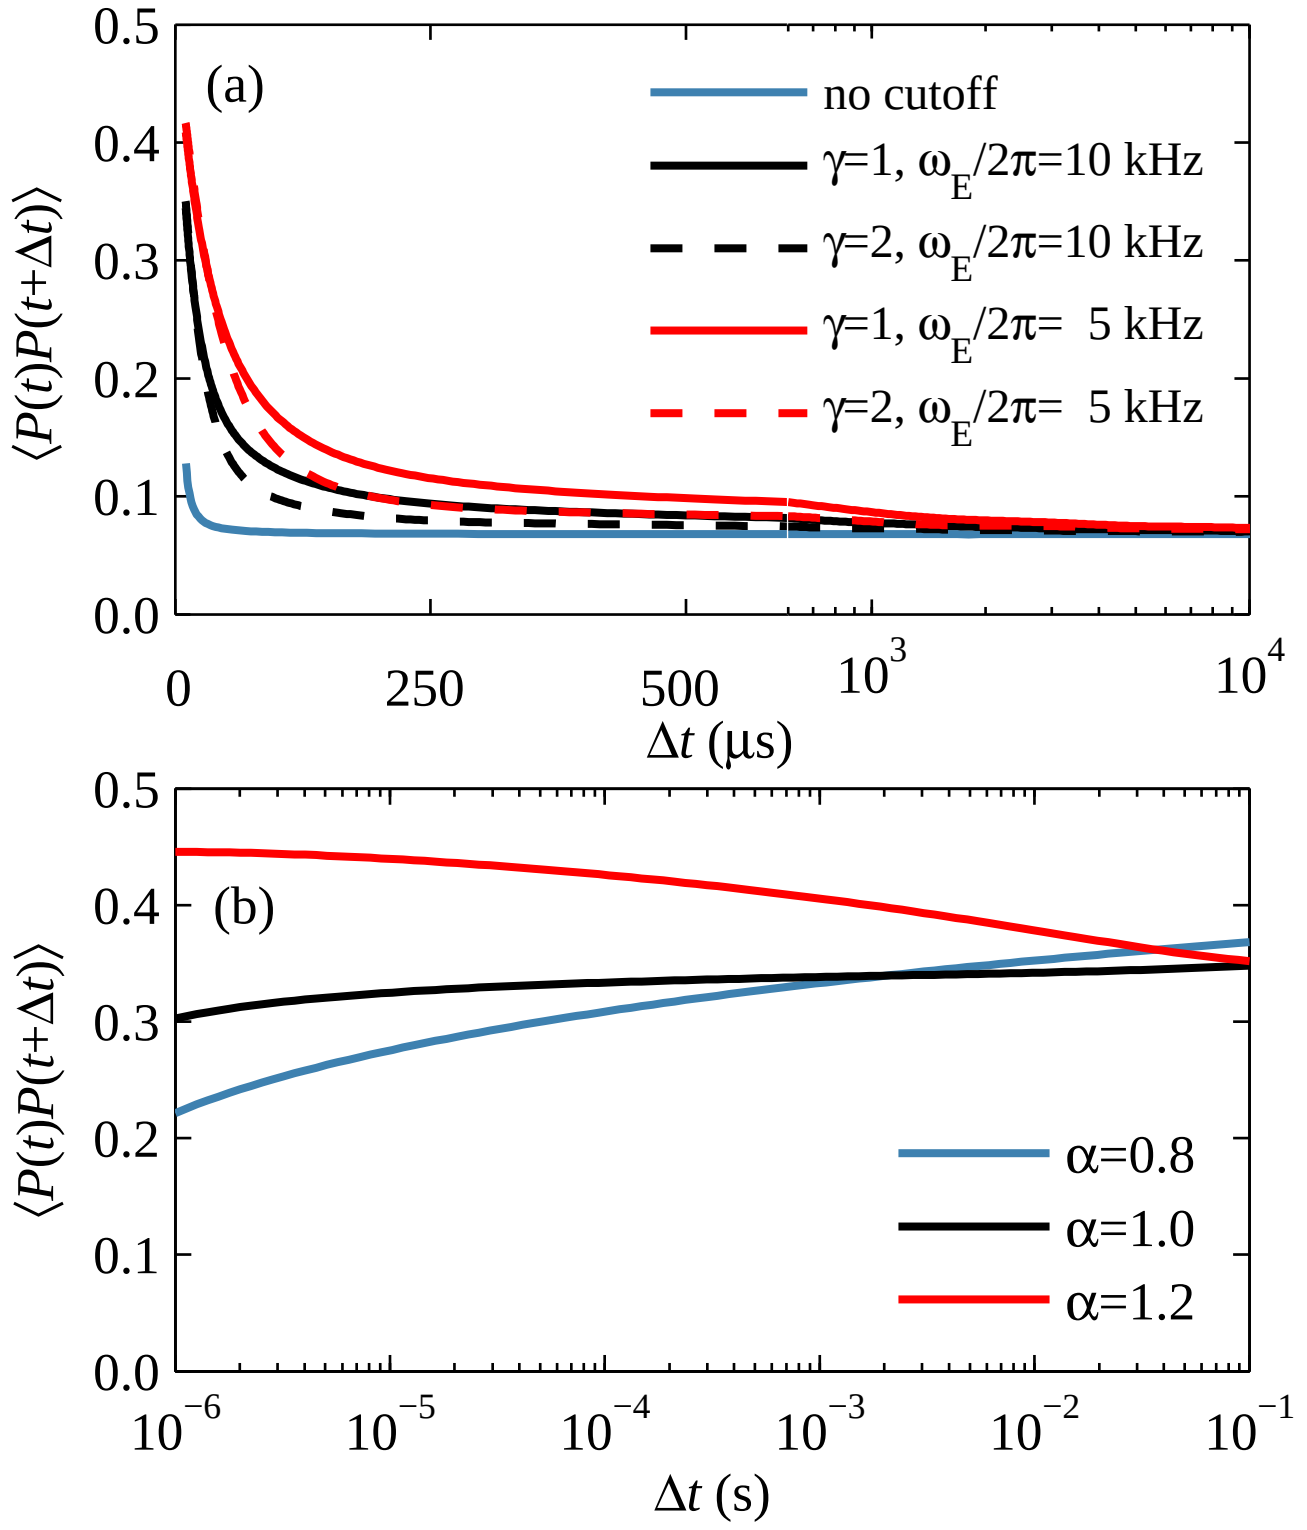

FIG. 3. (color online) (a) Autocorrelation function for the Singlet-Triplet qubit. Adjusting the evolution time allows for detection of the crossover and slope of curves with different cutoff behavior, thus providing well distinguishable characteristics on an experimentally measurable scale. The blue curve shows the autocorrelation in the absence of a cutoff. For $\Delta t > 600\,\mu$s the scale is semilogarithmic. Note that the plateau at large Δt directly reflects the prefactor of the $1/\omega^2$ region of the spectrum. (b) Autocorrelation function for the $1/f^\alpha$ spectrum. For $\tau \ll \Delta t \ll 1/\omega_L$ exact $1/f$ noise leads to a constant result. Deviations from this behavior (red and blue curves) allow for identification of α.

source of dephasing for several types of superconducting qubits [8, 10, 17, 18]. For a fixed $\tau \ll \Delta t$ and $\alpha > 1$, we obtain a decay of the form $\chi_- \propto \Delta t^{(\alpha-1)}$ while for $\alpha = 1$, $\chi_- \propto \ln(\Delta t/\tau)\tau^2$. As α is reduced below 1, the Δt dependence of χ_- becomes increasingly weak, so that a crossover to a constant χ_- corresponding to white noise is obtained. By adjusting $\tau \propto \Delta t \exp\left[W\left(-\frac{2c}{\Delta t^2}\right)\right]$, where $W(x)$ is the solution to $x = w\exp(w)$ and c is a constant setting the overall noise level, exact $1/f$-noise leads to a constant result for $\tau \ll \Delta t$, so that small deviations from $1/f$ in Fig. 3 (b) can be detected with high sensitivity over a very large frequency range. This allows in principle to probe arbitrarily low ω compared to the lower bound of $\sim 0.1\,$MHz of Ref. [10] which was limited by the T_2 time of the qubit. For superconducting qubit systems, initialization is realized trough relaxation making our previous assumption of fast initialization invalid as the initialization time is on the order of T_1. To overcome this problem, initialization can be replaced by measurement which is fast and also provides the information needed to evaluate the autocorrelator.

In conclusion, we have developed a method for noise spectroscopy that fills the frequency gap remaining between direct and pulse sequence-based noise spectroscopy. Moreover, it enables the identification of different cutoff behavior and frequency-dependencies in spin and superconducting qubits, respectively. As FID pulses and nanosecond-control of qubits are well established [15, 26–29], experimental implementation should be feasible. Introducing additional operations between the two evolution times might reveal whether the qubit state has non-negligible effects on the noise bath resulting in different autocorrelation functions.

This work was supported by the Alfried Krupp Prize for Young University Teachers of the Alfried Krupp von Bohlen und Halbach foundation. We would like to thank Lorenza Viola for useful comments.

[1] E. L. Hahn, Phys. Rev. **80**, 580 (1950).
[2] S. Meiboom and D. Gill, Rev. Sci. Instrum. **29**, 688 (1958).
[3] K. Khodjasteh and D. A. Lidar, Phys. Rev. A **75**, 062310 (2007).
[4] G.S. Uhrig, Phys. Rev. Lett. **98**, 100504 (2007).
[5] L. Cywiński, R.M. Lutchyn, C.P. Nave, and S. Das Sarma, Phys. Rev. B **77**, 174509 (2008).
[6] T. Yuge, S. Sasaki, and Y. Hirayama, Phys. Rev. Lett. **107**, 170504 (2011).
[7] K. C. Young and K. B. Whaley, (2011), arxiv:1102.5115v1.
[8] R.C. Bialczak, R. McDermott, M. Ansmann, M. Hofheinz, N. Katz, E. Lucero, M. Neeley, A.D. O'Connell, H. Wang, A.N. Cleland, and J.M. Martinis, Phys. Rev. Lett. **99**, 187006 (2007).
[9] D. Sank, R. Barends, R. C. Bialczak, Y. Chen, J. Kelly, M. Lenander, E. Lucero, M. Mariantoni, A. Megrant, M. Neeley, P. J. J. O'Malley, A. Vainsencher, H. Wang, J. Wenner, T. C. White, T. Yamamoto, Y. Yin, A. N. Cleland, and J. M. Martinis, "Flux noise probed with real time qubit tomography in a josephson phase qubit," (2012).
[10] J. Bylander, S. Gustavsson, F. Yan, F. Yoshihara, K. Harrabi, G. Fitch, D. G. Cory, Y. Nakamura, J.-S. Tsai, and W. D. Oliver, Nature Phys. **7**, 565 (2011).
[11] H. Bluhm, S. Foletti, I. Neder, M. Rudner, D. Mahalu, V. Umansky, and A. Yacoby, Nature Phys. **7**, 109 (2010).
[12] D. J. Reilly, J. M. Taylor, E. A. Laird, J. R. Petta, C. M. Marcus, M. P. Hanson, and A. C. Gossard, Phys. Rev. Lett. **101**, 236803 (2008).
[13] G. de Lange, T. van der Sar, M. S. Blok, Z. H. Wang, V. V. Dobrovitski, and R. Hanson, (2011), arXiv:1104.4648v2.
[14] S. Amasha, K. MacLean, I. P. Radu, D.M. Zumbühl, M.A. Kastner, M. P. Hanson, and A. C. Gossard, Phys. Rev. Lett. **100**, 046803 (2008).

[15] J. R. Petta, A. C. Johnson, J. M. Taylor, E. A. Laird, A. Yacoby, M. D. Lukin, C. M. Marcus, M. P. Hanson, and A. C. Gossard, Science **309**, 2180 (2005).

[16] H. Bluhm, S. Foletti, D. Mahalu, V. Umansky, and A. Yacoby, Phys. Rev. Lett. **105**, 216803 (2010).

[17] Y. Nakamura, Y.A. Pashkin, T. Yamamoto, and J.-S. Tsai, Phys. Rev. Lett. **88**, 047901 (2002).

[18] F. Yoshihara, K. Harrabi, A.O. Niskanen, Y. Nakamura, and J.-S. Tsai, Phys. Rev. Lett. **97**, 167001 (2006).

[19] K. Kakuyanagi, T. Meno, S. Saito, H. Nakano, K. Semba, H. Takayanagi, F. Deppe, and A. Shnirman, Phys. Rev. Lett. **98**, 047004 (2007).

[20] C. Barthel, D. J. Reilly, C. M. Marcus, M. P. Hanson, and A. C. Gossard, Phys. Rev. Lett. **103**, 160503 (2009).

[21] J. M. Taylor, J. R. Petta, A. C. Johnson, A. Yacoby, C. M. Marcus, and M. D. Lukin, Phys. Rev. B **76**, 035315 (2007).

[22] W. M. Witzel and S. Das Sarma, Phys. Rev. B **74**, 035322 (2006).

[23] J. Medford, L. Cywiński, C. Barthel, C. M. Marcus, M. P. Hanson, and A. C. Gossard, Phys. Rev. Lett. **108**, 086802 (2012).

[24] M.J. Biercuk and H. Bluhm, Phys. Rev. B **83**, 235316 (2011).

[25] F. H. L. Koppens, J. A. Folk, J. M. Elzerman, R. Hanson, L. H. W. van Beveren, I. T. Vink, H. P. Tranitz, W. Wegscheider, L. P. Kouwenhoven, and L. M. K. Vandersypen, Science **309**, 1346 (2005).

[26] S. Foletti, H. Bluhm, D. Mahalu, V. Umansky, and A. Yacoby, Nature Phys. **5**, 903 (2009).

[27] K. C. Nowack, F. H. L. Koppens, Y. V. Nazarov, and L. M. K. Vandersypen, Science **318**, 1430 (2007).

[28] F. H. L. Koppens, D. Klauser, W. A. Coish, K. C. Nowack, L. P. Kouwenhoven, D. Loss, and L. M. K. Vandersypen, Phys. Rev. Lett. **99**, 106803 (2007).

[29] A. Lupaşcu, E. F. C. Driessen, L. Roschier, C. J. P. M. Harmans, and J. E. Mooij, Phys. Rev. Lett. **96**, 127003 (2006).